

Demi

Installation Guide for Covering Electric Baseboard Heaters

Note: We only recommend Demi baseboard covers for use on electric baseboard heaters that do not vent upwards. Use the guide below to determine if the Demi baseboard covers will work for your particular heater. Do not use the covers if they do not meet the conditions within this guide.



WARNING


Sharp edges. Watch your fingers.

WHEN USING ELECTRICAL APPLIANCES, BASIC PRECAUTIONS SHOULD ALWAYS BE FOLLOWED TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, AND INJURY TO PERSONS, INCLUDING THE FOLLOWING:

1. Read all instructions before installing or using the cover.
2. Sharp edges and corners may be present on the baseboard cover panel. Any sharp edges will be covered after installation using the proper end cap. Please use caution during installation to avoid injury.
3. To avoid fire do not block air intakes or exhaust in any manner.
4. Do not insert or allow foreign objects to enter any ventilation or exhaust opening as this may cause and electric shock or fire, or damage the heater.
5. This heater cover is hot when in use. To avoid burns, do not let bare skin touch hot surfaces. Keep combustible materials such as furniture, pillows, bedding, papers, and curtains away from heater.


1 Remove the front panel.

If possible. Using your hands only, gently unclip or remove the front panel. No tools should be necessary to do this. If this is not possible, go directly to step 2.

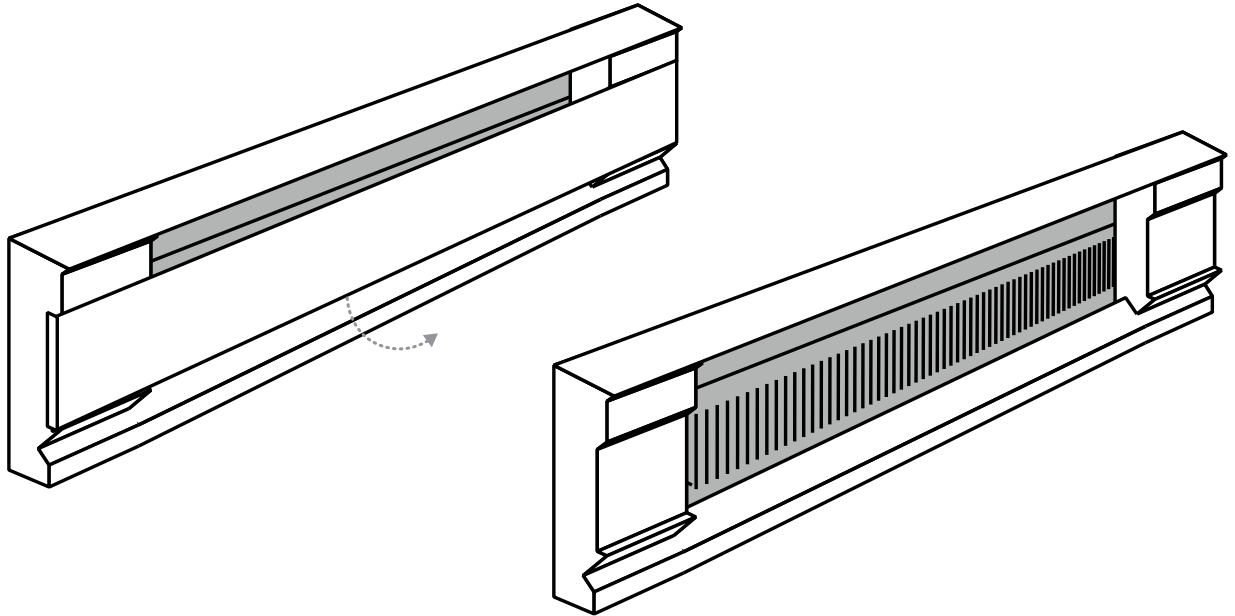

2 Install the Demi panel over the heater.


You should be able to hang the Demi panel over the top of your existing heater, pressing the top edge between the heater and the wall. If there is not enough space to firmly place the cover, see Step 2a (Page 4) for instructions on how to install using mounting brackets.

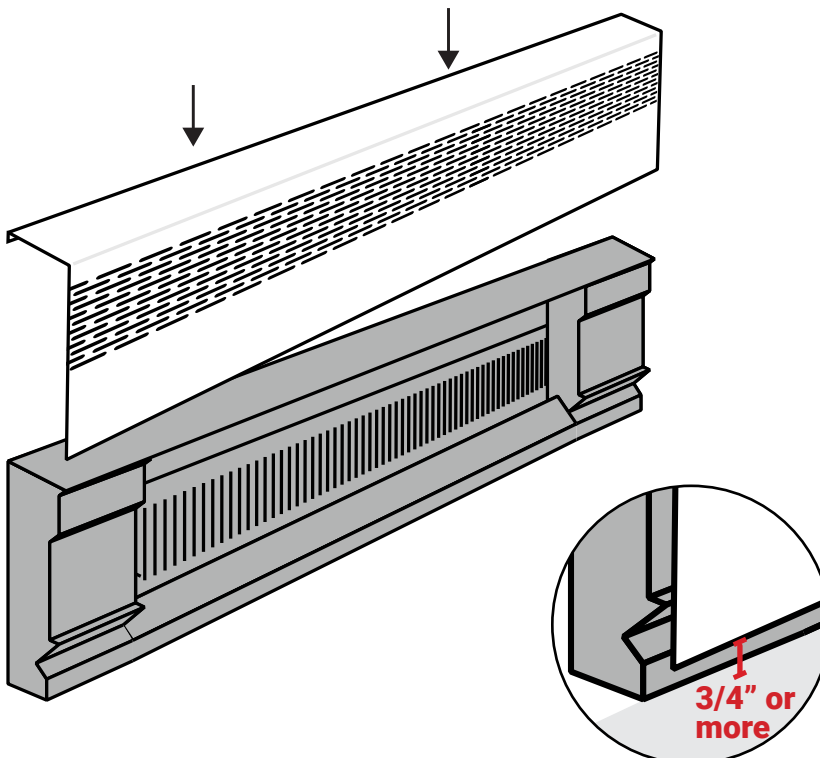

Please make sure there is a clearance of **at least 3/4 of an inch** between the heater cover and the floor to ensure proper air flow.

3 Install the end caps.


Ensure your end caps will sit flush against the wall. You will need to use the "closed" end caps as they provide structural support to the Demi panel.

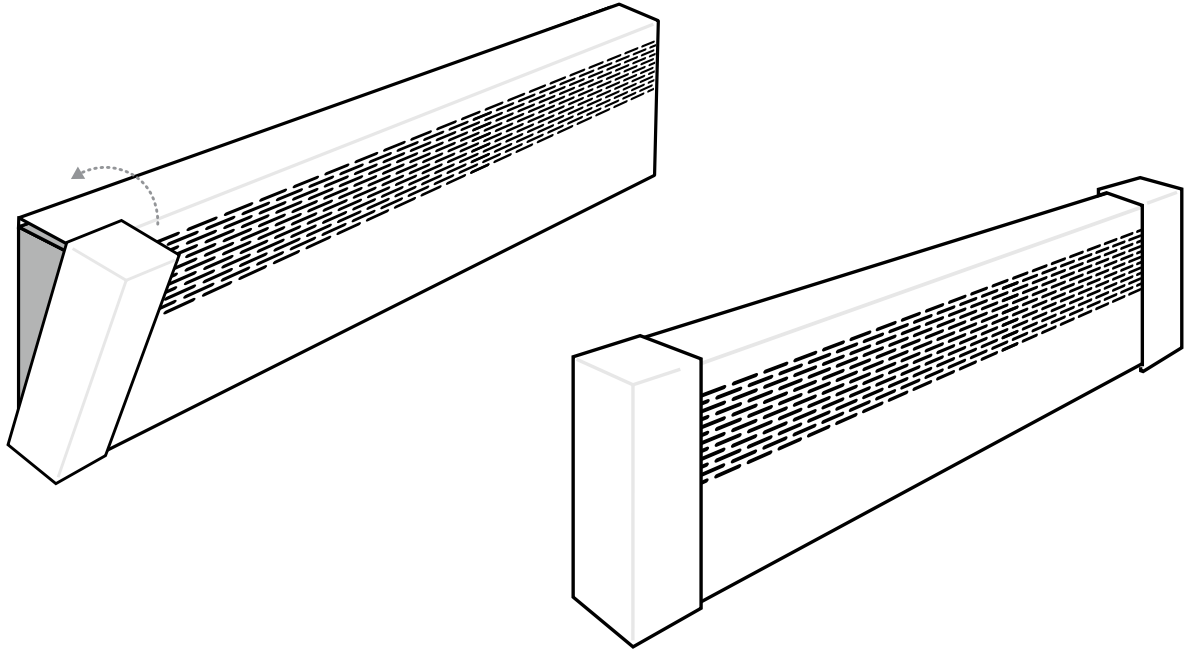

Note: Most electric baseboard heaters have wood baseboard trim tight to each end of the heater and this will prevent the end caps from being installed properly. If this is the case in your home, the Demi end caps will not sit flush against the wall and you will need to do one of the following prior to installation:


Option 1: trim baseboard

Cut back the wood baseboard trim by $\frac{1}{4}$ " on either side to allow the end caps to sit flush with the wall.

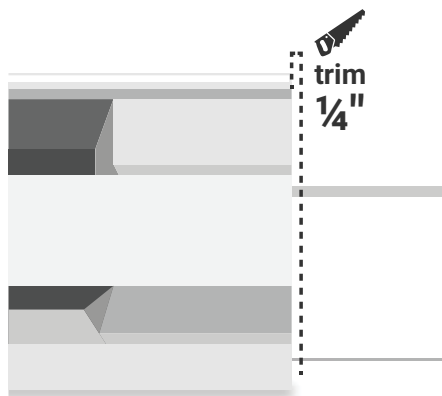

Option 2: trim end cap


Use tin snips to notch the backs of the Demi end caps to allow them to sit flush against the wall around the baseboard trim.

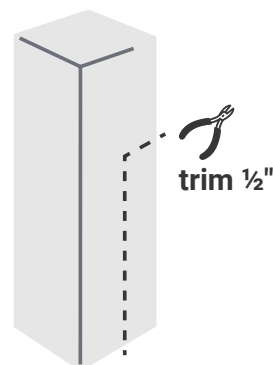

Install the Demi panel using mounting brackets.


2a Fasten the mounting brackets to the wall.

Using a screwdriver, install the mounting brackets above the baseboard heater at a height that allows for a $\frac{3}{4}$ " gap between the floor and the bottom of the Demi panel.





b Install the Demi panel over the brackets.

Press the top edge along the top of the mounting brackets, with the edge sitting between the bracket and the wall.

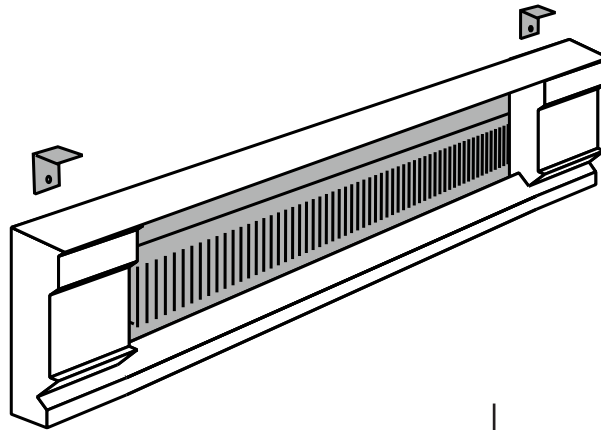


Please make sure there is a clearance of **at least $\frac{3}{4}$ of an inch** between the heater cover and the floor to ensure proper air flow.

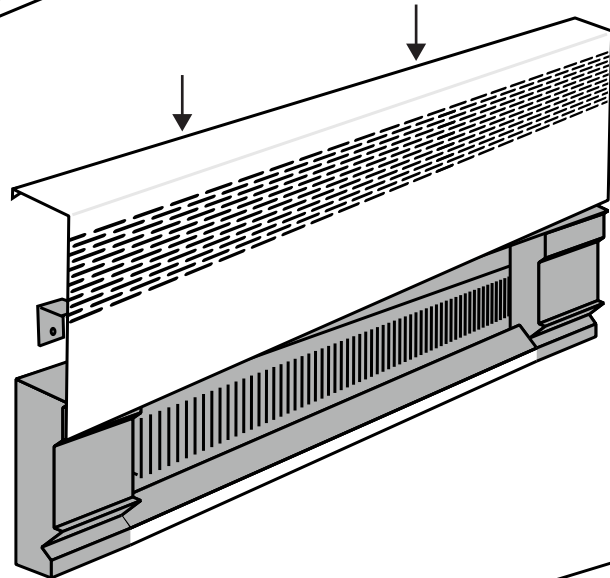

For more information on installing a cover using mounting brackets:


We've created a guide outlining the steps in greater detail. Download it here:

[DOWNLOAD GUIDE](#)

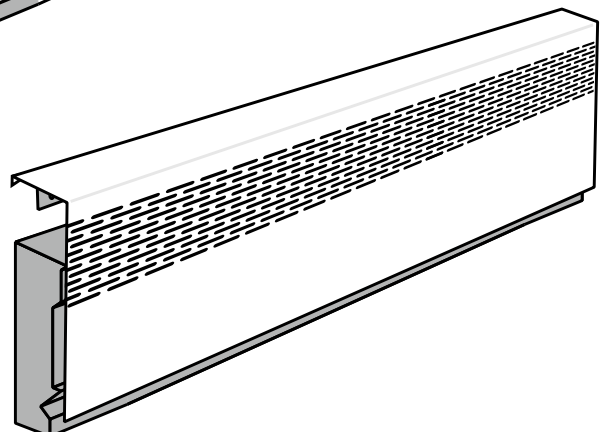

Combining multiple panels for extra long heaters.

You can join to adjacent panels using the coupler piece. Fit the coupler onto the bottom of the baseboard cover and then snap into place at the top.

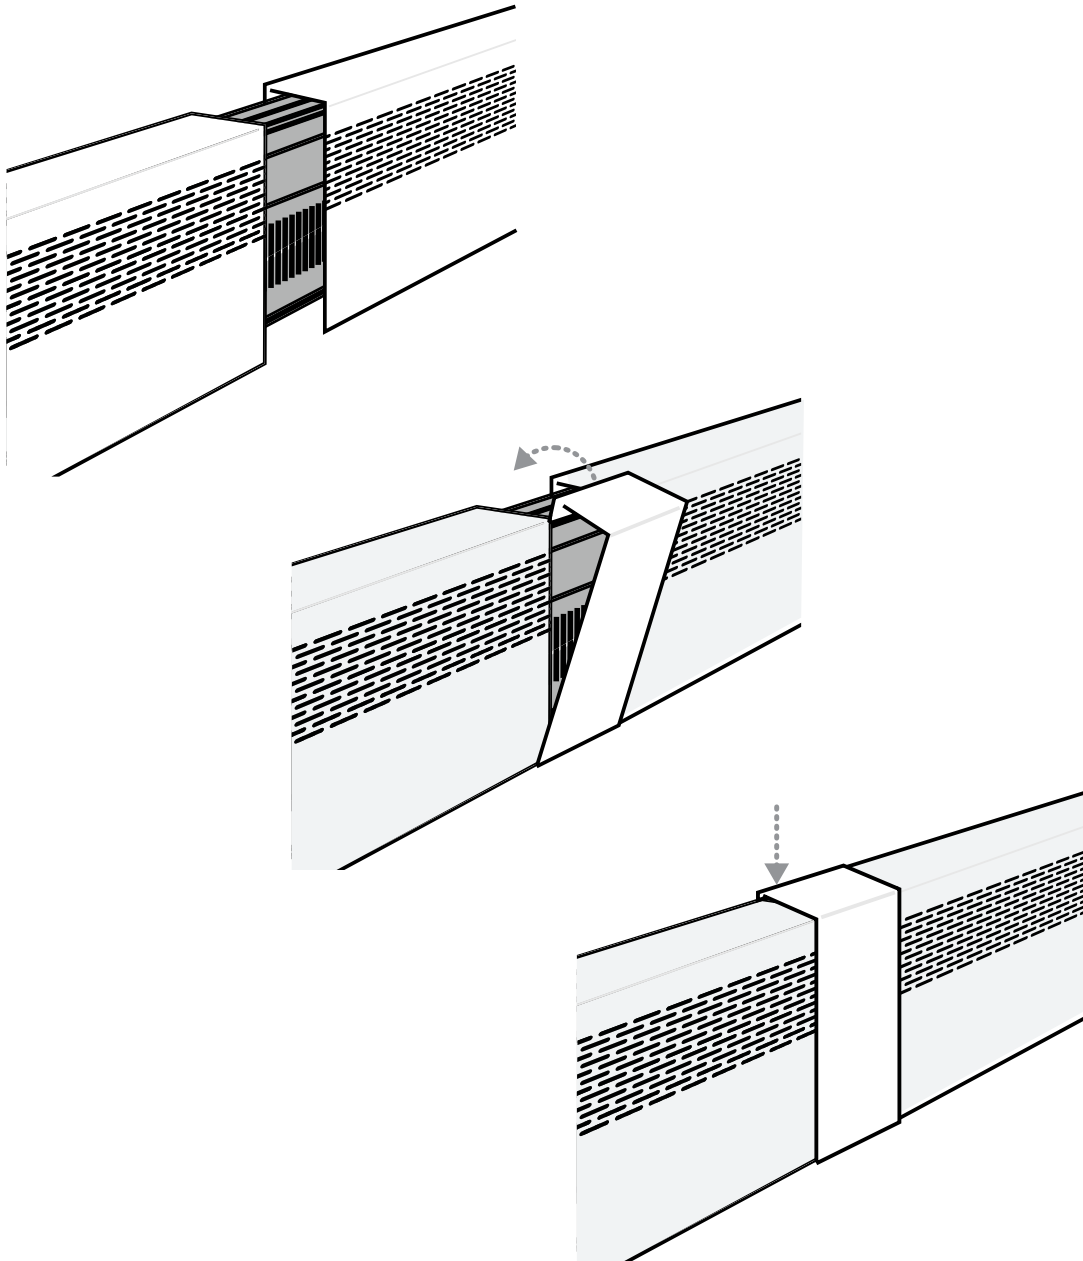

Questions? Call us.

Visit coversbyveil.com/contact-us or call us at 1-833-567-5050.

CONTACT US